



Fitting Instructions for Aluminium Venetian Blinds

If installing on plaster or wallboard where possible pick up timber stud. If unable to locate stud, use a suitable wall plug or toggle for plasterboard to hold the brackets. Mark the positions for the brackets. The end brackets should be about 70mm in from the ends. Any other brackets should be positioned evenly between the end brackets. Make sure the brackets aren't positioned over any ladders as this may interfere with the componentry in the head rail.

Hold the front edge of the head rail over the front hooks of the brackets. Gently push back on the head rail and twist the back edge up to lock it in place.

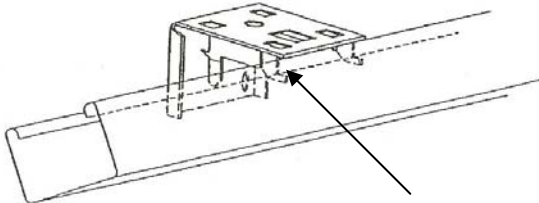

Hook in the front edge of the Blind first

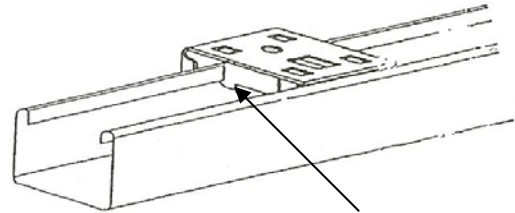


Push the Blind up into the rear bracket hooks

Fit hold-down clips if desired. Fully lower the blind to determine the position of the hold-down clips at the base of the window. Secure the hold-down clips with the screws provided.

How to install the Cord Cleat

The Cord Cleat is used to tie excess cords out of the reach of children. When fitted at a suitable height cords can be wrapped around the Cleat, keeping them out of reach of children and neatly off the floor or furniture.

1. Position the Cleat against the window frame in a place that is accessible to the user while remaining inaccessible to small children.
2. Use a drill to fasten the Cleat with the two screws provided.



Fasten using screws

WARNING

Young children can STRANGLE in cord bead chain loops. They can also wrap cords around their necks and STRANGLE.

Always keep cords and bead chains out of children's reach.

Install safety devices that remove the cord loop or reduce access to cords

Move cots, play pens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords.

Do not tie cords together. Make sure cords do not twist together and create a loop.

