



PARTS INCLUDED

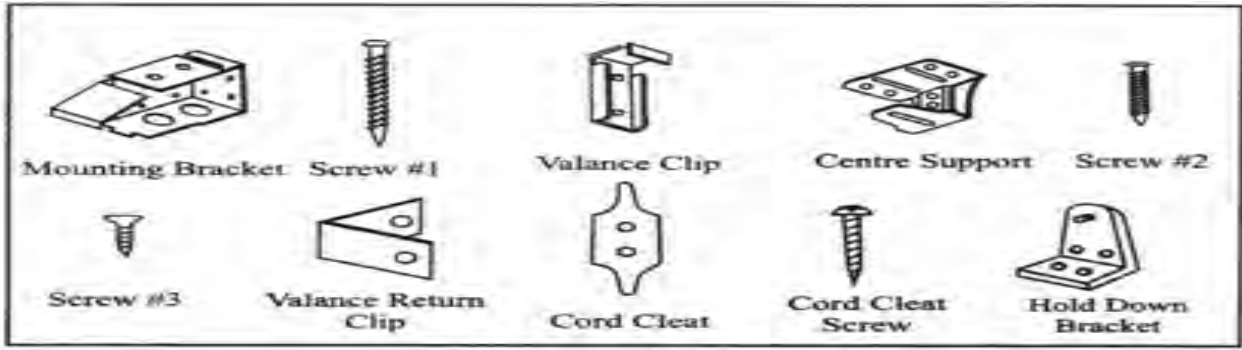


IMPORTANT NOTES:


1. Please check that all parts have been supplied before you begin to assemble your new Custom Venetian blind.
2. Ensure that the blind is mounted level for correct operation.

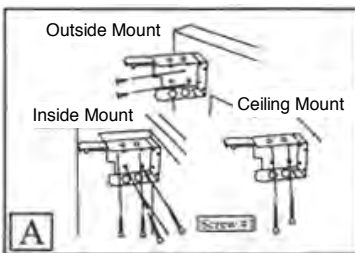


A) The mounting brackets should be fitted 6mm past each end of the headrail using screw #1. The bracket doesn't necessarily need to touch the inside face of the window frame,

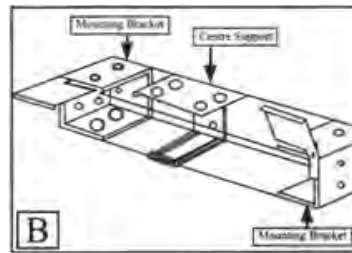

B) Align the top of the centre support bracket with the top of the mounting bracket before installation. Install with the bigger flap of the centre support bracket on the top side, away from any ladder cord positions.

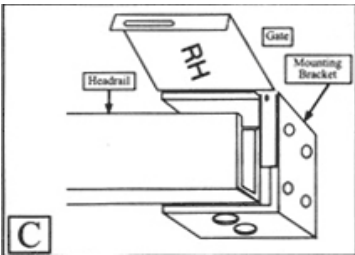


C) Push the headrail into the brackets, then press the gate down until it clicks to close the brackets.

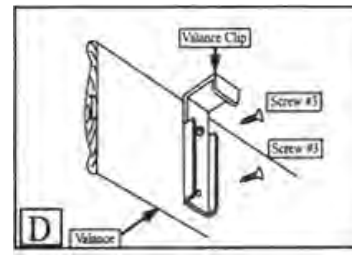


D) Screw valance clips onto back side of the valance with screws provided (screw#3), flush with the top of the valance.

For Outside Mount:

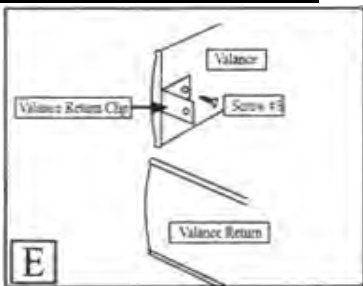


E) Screw one end of the valance return clip onto the valance using screw #3. Align the edge of the valance return with the valance. Screw the other end of the valance return clip onto the valance return.

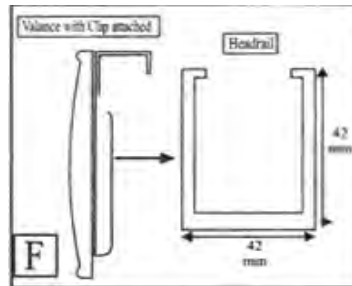


F) Hook valance clip with valance attached onto the top of the headrail.

General Operation of blind:

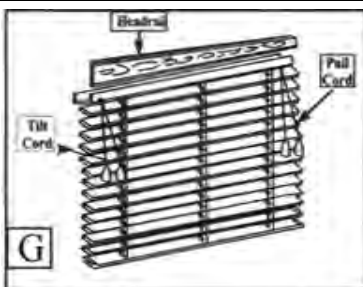

G) Always tilt blind horizontally before raising/lowering to extend the life of the blind.
To Lower Blind: Move cord to left, pulling down gently until cord lock releases.
To Lock Cords: Pull cord right and release. Cord will lock automatically.

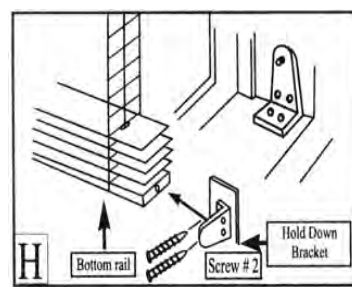

Hold Down Brackets: Using screws provided (screw#2), screw base of hold down bracket to window facing or wall. Snap bracket window pin ends into the holes in the ends of the bottom rail.



WARNING - ALL WINDOW COVERINGS WITH CORD OR CHAIN

To avoid creating a possible strangulation hazard for children, the corded or chained internal window covering must be installed in such a way that a loose cord or chain cannot form a loop 220mm or longer at a height of less than 1600mm above floor level.

* A cord/chain guide may be installed lower than 1600mm above floor level if the cord/chain is sufficiently secured or tensioned to prevent a loop 220mm or longer from being formed.

* If a cord/chain guide is installed lower than 1600mm above floor level, it must be designed to prevent a child from being able to remove the cord/chain.

* If a cleat is used to secure the cord, it must be at least 1600mm above floor level because a child is capable of unwinding a cord from a cleat.