

IMPORTANT NOTES:

1. Please check that all parts have been supplied before you begin to assemble your new Roman Blind.

2. The finished blind size is:

(i) **OUTSIDE Mount: as per size ordered.**

(ii) **INSIDE Mount: width less 10mm, drop less 5mm**

3. Ensure that the blind is mounted level for correct operation.

" A Roman Blind may appear short in its drop on initial installation, however over a short period of time, the fabric will settle and sit at the correct drop length. Environmental conditions can also impact on the settling out process."

1. Positioning Blind

As per your order, determine the correct fitting location


- (i) inside the window frame (Inside Mount) or;
- (ii) on the window frame or wall (Outside Mount)

2. Installing Mounting Brackets

Inside Mount:

(i) The Installation Brackets are fixed directly to the mounting surface, spaced evenly. Make sure all brackets are in a straight line so that the track will attach easily.


(ii) If possible, mount the first bracket between the control mechanism and the first draw cord for maximum support.



Outside Mount:


(i) The Installation Brackets are fixed directly to the architrave or wall, spaced evenly. Make sure all brackets are level.

(ii) If possible, mount the first bracket between the control mechanism and the first draw cord for maximum support




3. Attaching Blind to Bracket

(i) Place headrail (track) onto the top lip of the brackets and 'snap' into place.

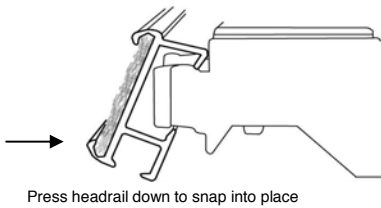

(ii) To release headrail, press the flexible lip underneath the bracket



4. Operating Cordlock Roman Blind

To lower the blind:

Pull gently downwards on all the operating cords together (to release the cordlock) then carefully raise the cords to the desired location. With a quick easy downwards motion, the cordlock will lock the cords.

To raise the blind:

Pull gently downwards until the desired location is reached, then with a quick easy upwards motion, the cord lock will lock the blind in that position.

5. Attaching Cord Cleat

Position the cord cleat at a height that is comfortable to use, that will keep the cords out of reach from children and pets.



WARNING - ALL WINDOW COVERINGS WITH CORD OR CHAIN

To avoid creating a possible strangulation hazard for children, the corded or chained internal window covering must be installed in such a way that a loose cord or chain cannot form a loop 220mm or longer at a height of less than 1600mm above floor level.

* A cord/chain guide may be installed lower than 1600mm above floor level if the cord/chain is sufficiently secured or tensioned to prevent a loop 220mm or longer from being formed.

* If a cord/chain guide is installed lower than 1600mm above floor level, it must be designed to prevent a child from being able to remove the cord/chain.

* If a cleat is used to secure the cord, it must be at least 1600mm above floor level because a child is capable of unwinding a cord from a cleat.